


ENGINEERED FOR VERSATILITY

OleTex[®] CDJW 400

Closed cell PE / EVA crosslinked polyolefin foam in continuous rolls / sheets form

- // Chemically crosslinked
- // Tested per ASTM D 3575
- // Film on 2 sides
- // Multiple colors available

www.armacell.us

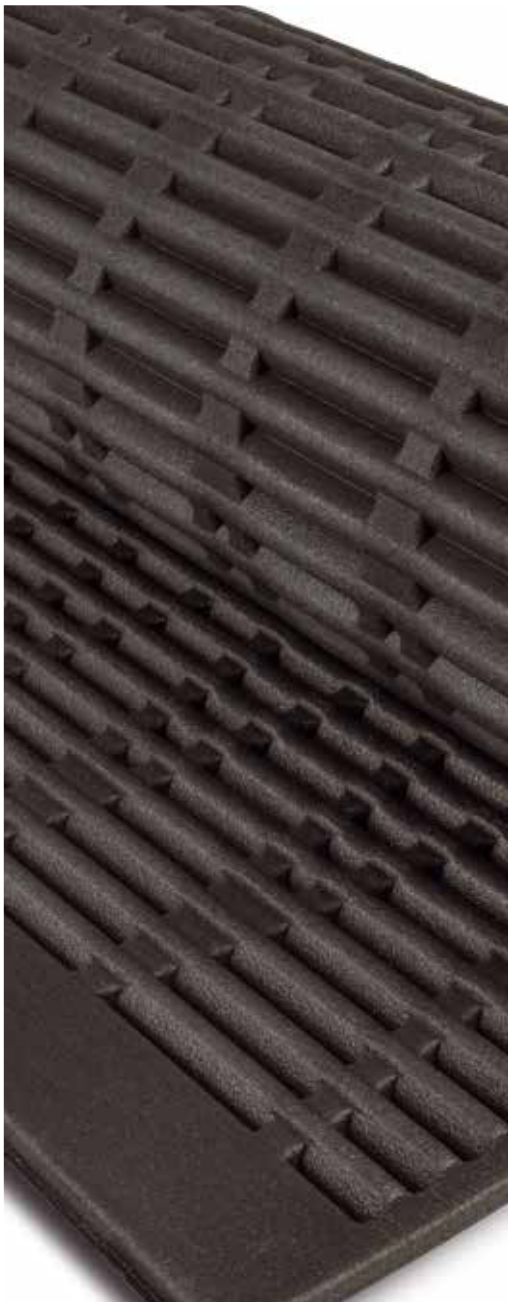

 **armacell**[®]
ArmaComp[®]

OLETEX CDJW 400 | Closed cell PE / EVA crosslinked polyolefin foam in continuous rolls / sheets form

OleTex CDJW 400: Armacell (Yukon, OK Plant) manufactures a continuous, (rolls / sheets) closed cell, 3.6 - 4.4 lb/ft³ (57.7 - 70.5 kg/m³) density, PE / EVA blended crosslinked polyolefin foam product CDJW 400. CDJW 400 meets the requirements of FMVSS 302 at 0.250" (1/4") (6.35 mm) & higher. CDJW 400 has film on two sides. CDJW 400 is available in a variety of colors. ** This product is not intended for elevated temperature applications.

TECHNICAL DATA SHEET | ROLLS / SHEETS (effective 9DEC21)

POLYMER: PE / EVA

| Physical Property | Test Method | Unit | Value |
|-----------------------------|----------------------|---|------------------------------------|
| Cell Structure | - | - | Closed |
| Color | - | - | Multiple |
| Compression Deflection 10% | ASTM D 3575 Suffix D | psi kPa | 5.6 - 6.9 38.6 - 47.6 |
| Compression Deflection 25% | ASTM D 3575 Suffix D | psi kPa | 8.6 - 10.6 59.3 - 73.1 |
| Compression Deflection 40% | ASTM D 3575 Suffix D | psi kPa | 13 - 15.8 89.6 - 109 |
| Compression Deflection 50% | ASTM D 3575 Suffix D | psi kPa | 17.9 - 21.3 123 - 147 |
| Compression Set (Room temp) | ASTM D 3575 Suffix B | % | 10 max |
| Density | ASTM D 3575 Suffix W | lb/ft ³ kg/m ³ | 3.6 - 4.4 57.7 - 70.5 |
| Elongation | ASTM D 3575 Suffix T | % | 131.6 min |
| Flammability | FMVSS 302 | in mm | 0.25 and higher 6.35 and higher |
| Service Temperature | Low | - | °F °C |
| | | - | -65 -54 |
| Service Temperature | High Intermittent | - | °F °C |
| | | - | 210 99 |
| Tear Strength | ASTM D 3575 Suffix T | lb/in | 21.9 min |
| | | kN/m | 3.8 min |
| Tensile Strength | ASTM D 3575 Suffix T | psi | 75 min |
| | | kPa | 520 min |
| Thermal Stability | ASTM D 3575 Suffix S | % | 0.4 max |
| Water Absorption | ASTM D 3575 Suffix L | lb/ft ² | 0.1 max |
| | | kg/m ² | 0.5 max |

All data and technical information are based on results achieved under the specific conditions defined according to the testing standards referenced. Despite taking every precaution to ensure that said data and technical information are up to date, Armacell does not make any representation or warranty, express or implied, as to the accuracy, content or completeness of said data and technical information. Armacell also does not assume any liability towards any person resulting from the use of said data or technical information. Armacell reserves the right to revoke, modify or amend this document at any moment. It is the customer's responsibility to verify if the product is suitable for the intended application. The responsibility for professional and correct installation and compliance with relevant building regulations lies with the customer. This document does not constitute nor is part of a legal offer to sell or to contract.

At Armacell, your trust means everything to us, so we want to let you know your rights and make it easier for you to understand what information we collect and why we collect it. If you would like to find out about our processing of your data, please visit our [Data Protection Policy](#).

© Armacell, 2022. All rights reserved. Trademarks followed by © or TM are trademarks of the Armacell Group.
OleTex CDJW 400 | DataSheet | 012022 | NA | EN-A

ABOUT ARMACELL

As the inventors of flexible foam for equipment insulation and a leading provider of engineered foams, Armacell develops innovative and safe thermal, acoustic and mechanical solutions that create sustainable value for its customers. Armacell's products significantly contribute to global energy efficiency making a difference around the world every day. With 3,000 employees and 23 production plants in 15 countries, the company operates two main businesses, Advanced Insulation and Engineered Foams. Armacell focuses on insulation materials for technical equipment, high-performance foams for high-tech and lightweight applications and next generation aerogel blanket technology.

For more information, please visit:

www.armacell.us

info.cf.us@armacell.com

800-973-0490

